



# Motion C&G SP X

## Technical Data

Made for  
 iPhone | iPad | iPod

7X

5X

3X

2X

1X

DX



### Earhook

- 82 dB / 140 dB SPL  
(2 ccm coupler)
- 86 dB / 144 dB SPL  
(ear simulator)


Data sheet also applicable for Motion C&G SP sDemo DX

# Motion C&G SP X | Technical Data

Type	Earhook	
	2 ccm coupler	Ear simulator
<b>Output sound pressure level</b>		
OSPL 90 at 1.6 kHz	–	135 dB SPL
OSPL 90 (Peak)	140 dB SPL	144 dB SPL
HFA-OSPL 90	133 dB SPL	–
<b>Gain</b>		
FOG at 1.6 kHz	–	77 dB
FOG (peak)	82 dB	86 dB
HFA-FOG	74 dB	–
Reference test gain	56 dB	60 dB
<b>Frequency, noise and directivity</b>		
Frequency range 7X 5X / 3X / 2X / 1X	100 - 5400 Hz 100 - 5400 Hz	100 - 5400 Hz 100 - 5400 Hz
Equivalent input noise	18 dB SPL	18 dB SPL
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	5 / 1 / 1 / 1 %	5 / 2 / 2 / – %
Tinnitus Function broadband	94 dB SPL	–
AI-DI		3.8 dB
Latency		< 15 ms
<b>Inductive coil sensitivity</b>		
MASL (1 mA/m) at 1.6 kHz	–	108 dB SPL
HFA MASL (1 mA/m)	104 dB SPL	–
HFA SPLITS (left/right)	116 / 116 dB SPL	–
RSETS (left/right)	0 / 0 dB	–
HFA SPLIV	116 dB SPL	–
<b>Battery</b>		
Battery runtime (without streaming)		up to 61 h
Battery runtime (incl. 5 h streaming)		up to 57 h
<b>IRIL IEC 60118-13:2016 Ed. 4.0</b>		
700-960 MHz (rating)		user
1400-2000 MHz (rating)		user
2000-2700 MHz (rating)		user
<b>ANSI C63.19-2011</b>		
800-950 MHz (rating)		M4/T4
1600-2500 MHz (rating)		M4/T4


Please find additional information to the values on page “Further Information”.

# Motion C&G SP X | Fitting Range



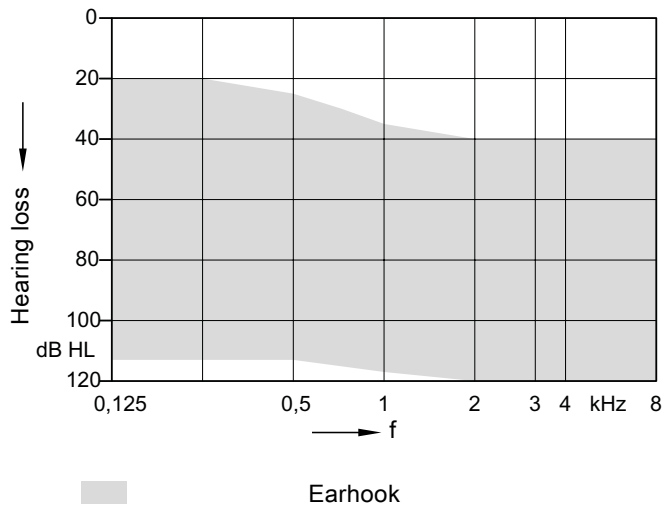


# Earhook | Basic Data




## 2 ccm coupler

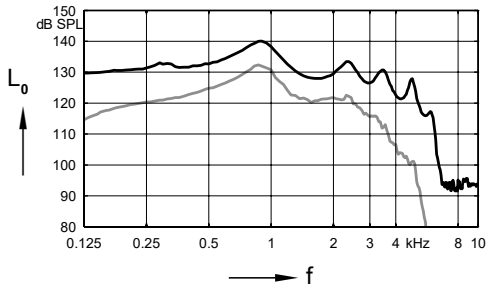

## Ear simulator

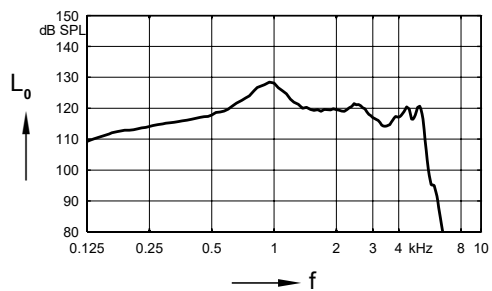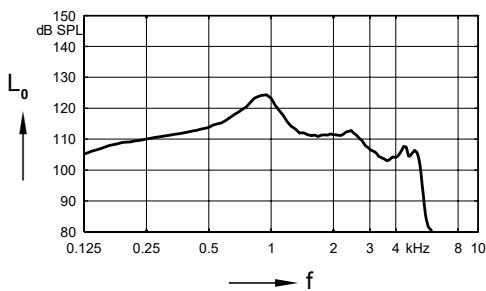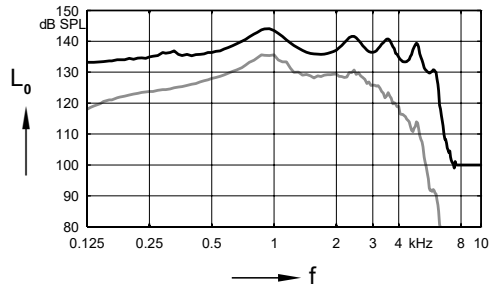

## Inductive response

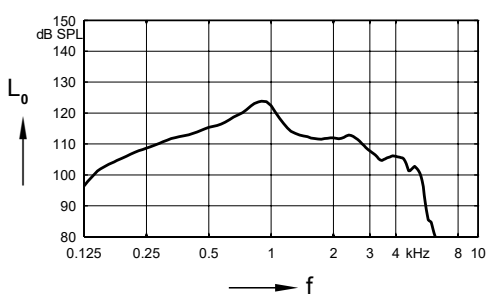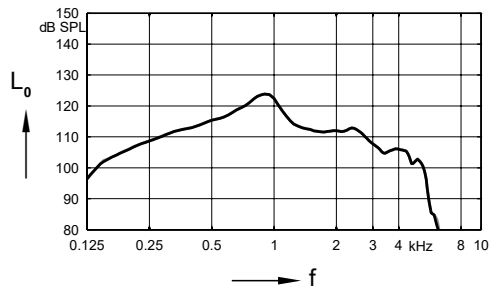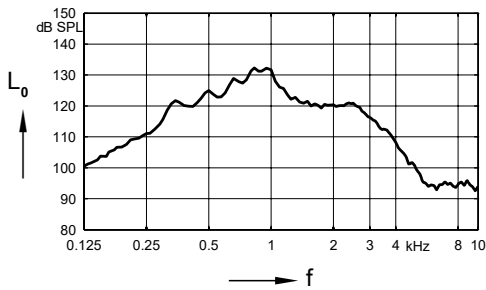

# Motion C&G SP X | Features and Accessories

	7X	5X	3X	2X	1X
<b>Dynamic Soundscape Processing</b>	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
<b>OVP (Own Voice Processing) <sup>1)</sup></b>	■■■■■	■■■■■	■■■■■	—	—
<b>Sound Clarity</b>	■■■■■	■■■■■	■■■	■■■	■■
Signal processing (channels) / Gain&MPO (handles)	34 / 16	32 / 16	24 / 12	16 / 8	16 / 8
Hearing programs	6	6	6	4	4
Extended dynamic range	✓	✓	✓	✓	✓
Extended bandwidth	—	—	—	—	—
EchoShield	✓	—	—	—	—
HD Music (presets)	3	3	1	1	—
eWindScreen <sup>2)</sup>	Binaural	Binaural	Monaural	Monaural	—
Speech and noise management	✓	✓	✓	✓	✓
SoundSmoothing	✓	✓	✓	✓	—
Feedback cancellation	✓	✓	✓	✓	✓
<b>Speech Quality</b>	■■■■■	■■■■■	■■■	■■	■■
Directionality (Automatic / Adaptive)	Binaural	Binaural	Binaural	✓	✓
Spatial SpeechFocus <sup>1) 3)</sup>	✓	✓	—	—	—
TwinPhone <sup>1)</sup>	✓	✓	✓	—	—
Frequency compression	✓	✓	✓	✓	✓
<b>Wearer Interaction</b>	■■■■■	■■■■■	■■■■■	■■■■■	■■■■■
Signia App (iOS and Android)	✓	✓	✓	✓	✓
Spatial Configurator	✓	✓	—	—	—
Adaptive Streaming Volume <sup>4)</sup>	✓	✓	✓	✓	✓
<b>Direct Streaming</b>	✓	✓	✓	✓	✓
Made for iPhone	✓	✓	✓	✓	✓
<b>Tinnitus</b>	✓	✓	✓	✓	—
Notched Amplification Therapy	—	—	—	—	—
Tinnitus noise therapy signal	✓	✓	✓	✓	—
<b>Fitting</b>	✓	✓	✓	✓	✓
Smart Optimizer and Data Logging	✓	✓	✓	✓	✓
Acclimatization manager	✓	✓	✓	✓	✓
InSituGram	✓	✓	✓	✓	✓
AutoFit	✓	✓	✓	✓	✓
<b>TeleCare</b>	✓	✓	✓	✓	✓
Remote Services	✓	✓	✓	✓	✓
Signia App	✓	✓	✓	✓	✓

<sup>1)</sup> req. bilateral fitting

<sup>2)</sup> Binaural used in dedicated programs for 5X

<sup>3)</sup> for 5X, right / left directionality available only in Stroll Program and via the Spatial Configurator

<sup>4)</sup> streaming only

■■■■■ highest feature performance  
 ✓ available — not available ○ optional

# Motion C&G SP X | Features and Accessories

	7X / 5X / 3X	2X / 1X
<b>Style specific features</b>		
Ingress Protection Rating	IP68	IP68
Charging contacts	✓	✓
Battery Size	—	—
Battery door on/off function	—	—
Nanocoated housing	✓	✓
e2e wireless 3.0	✓	✓
User controls coupling via e2e	✓	✓
Wireless programming	✓	✓
<b>Instrument configurations</b>		
Flat cover	—	—
Rotary volume control	—	—
Push button	—	—
Rocker switch	✓	✓
Color conversion kit	○	○
Color conversion kit with T-Coil	—	—
T-Coil	✓	✓
Battery door – child lock	—	—
Small earhook	○	○
<b>Programming accessories</b>		
ConnexxAir / ConnexxLink	— / —	— / —
Noahlink Wireless	○	○
Programming adapter / cable	—	—
<b>Accessories</b>		
D&C Charger BTE SP / Charger BTE SP	Mandatory	Mandatory
miniPocket	○	○
StreamLine TV	○	○
StreamLine Mic	○	○
CROS Pure 312 X	○	—
CROS Pure Charge&Go X	○	—
CROS Silk X	—	—

✓ available — not available ○ optional

# Motion C&G SP X | Further information

## Abbreviations

The following abbreviations are used in this datasheet:

OSPL	Output Sound Pressure Level
HFA	High Frequency Average
FOG	Full-On Gain
MASL	Magneto Acoustical Sensitivity Level
SPLITS	Coupler SPL for an Inductive Telephone Simulator
RSETS	Relative Equivalent Telephone Sensitivity
SPLIV	SPL In a Vertical magnetic field
AI-DI	Articulation Index - Directivity Index
IRIL	Input Related Interference Level
RTF	Reference Test Frequency

## Standards

- ▶ All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2014 and IEC 60118-0:2015 if applicable.
- ▶ All measurements with an ear simulator were performed according to IEC 118-0/A1:1994 and to DIN 45605 (frequency range) if applicable.
- ▶ Curves and figures representing FOG are measured with 20 dB reduction and 70 dB SPL input level.
- ▶ Figures representing Equivalent Input Noise incorporate a moderate expansion.
- ▶ Tinnitus noiser measurement conditions: all tinnitus single frequency sliders in max position, master volume slider in default position (0 dB) and local volume control in default position.
- ▶ Inductive coil sensitivity values, inductive response curves and T ratings apply for instruments with telecoil only.
- ▶ The current consumption is measured in reference test setting (RTS) according to the applicable standards. Due to the settling behaviour of hearing instruments supporting RF (radio frequency), the battery current is measured 3 minutes after turning on (note: no pairing)
- ▶ The battery runtime is based on first fit settings using 80 % of the fitting range and an ISTS (International Speech Test Signal) input signal at 65 dB SPL (note: pairing established). The actual battery runtime is determined by battery quality, hearing loss, sound environment, usage and activated feature set. Regarding RF usage (Bluetooth streaming) two different conditions are considered.
- ▶ The following acoustic connections / ear pieces were used:
  - Earhook

## Special note for instruments with built-in lithium-ion rechargeable battery

- ▶ The runtime of all lithium-ion rechargeable batteries reduces over time. The estimates are based on fresh lithium-ion rechargeable battery capacity. Under normal operating conditions, the battery will retain up to 80 % of its initial capacity after 2 years of use. Please note that battery performance will vary depending on individual usage patterns and environmental conditions.



“Made for iPod”, “Made for iPhone”, and “Made for iPad” mean that an electronic accessory has been designed to connect specifically to iPod, iPhone, or iPad, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPod, iPhone, or iPad may affect wireless performance.

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice. The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.